


Lead Lined Door Construction

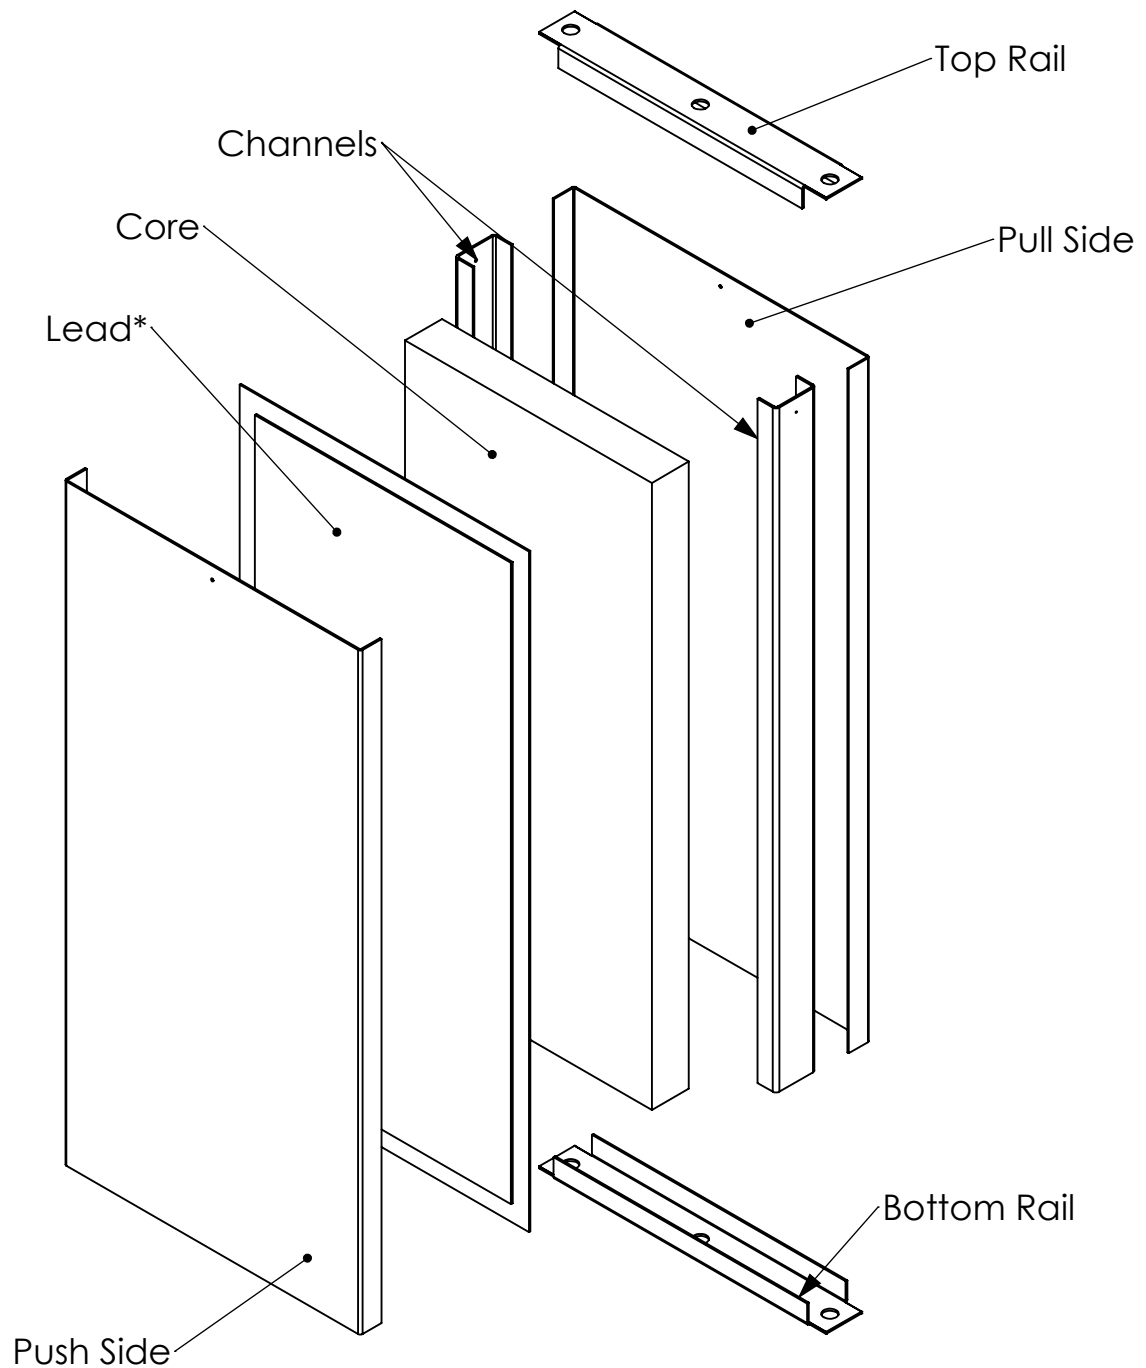

*Lead glued to push side unless otherwise specified

*Lead glued to core

Typical lead thickness 1/32"-1/4"

Seamless welded edges required

Door preparation for hardware done by manufacturer. Lead to be cut out in field